


CONTAINER CONVERSIONS

Durban: +27 31 769 1100
Johannesburg: +27 11 975 3800
reception@container.co.za

FLATPACK ABLUTION (6 X 2.4M)



FLOOR PLAN

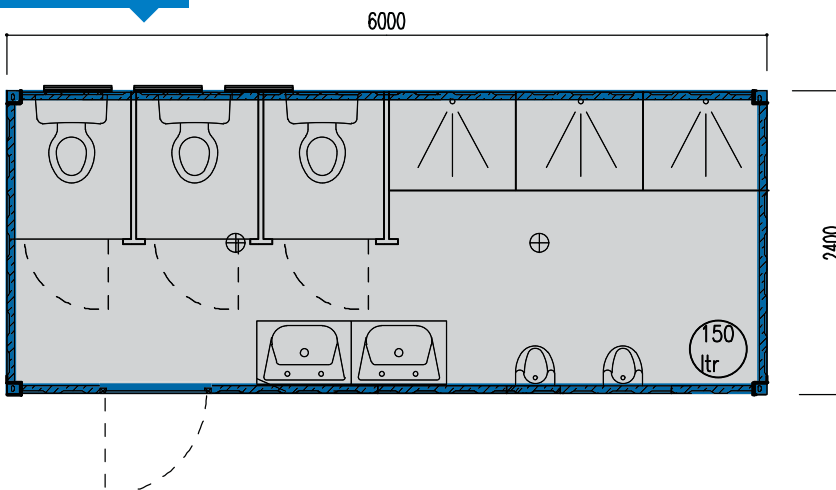

FRAME FLOOR

Made from cold rolled, welded steel profile, 4mm thick; 4 corner casts, SPHC
12PCS steel cross members, Q235A, 3mm thick.
FORKLIFT POCKET SIZE:
90mm x 256mm x 1200mm.
SUBFLOOR: 0.5mm thick galvanised steel sheet. 18mm cement floor.

FRAME ROOF

Made from cold rolled, welded steel profile, Q235A, 3mm thick; 4 corner casts
9PCS steel cross members, Q235A, thickness 3mm.
INSULATION: 50mm EPS (density: 1 2kg/m³) & 50mm Mineral Wool (density: 40kg/m³).
ROOF COVERING: 0.5mm thick galvanised steel sheet.
CEILING: 0.5mm thick galvanised steel sheet.

CORNER POSTS

Q235A, 3mm thick.

WALL PANELS

40mm polystyrene insulation with chromadek cladding internally and externally.

WINDOWS

6 x PT036 small aluminium window (533mm x 359mm) with aluminium burglar guards.

DOOR

1 x external chromadek door (840mm x 2040mm).

ELECTRICS

Distribution board, earth leakage, 1 x 15 amp double plug points, 2 x waterproof lights, 1 x light switch, 2 x ceramic urinals.

HANDBASIN

2 x single ceramic bowl sink.

ABLUTIONS

3 x ceramic toilets with plastic cistern & 3 x fibreglass base shower with plastic curtains & 200L geyser.

FLOORING

Marley industrial flooring.